

# Bluetooth Speaker

/ GVABS09



## Instruction Manual


**12**  
MONTH

MANUFACTURER'S  
**WARRANTY**


# GVA

THE 'V' STANDS  
FOR VALUE.

## Speaker explained

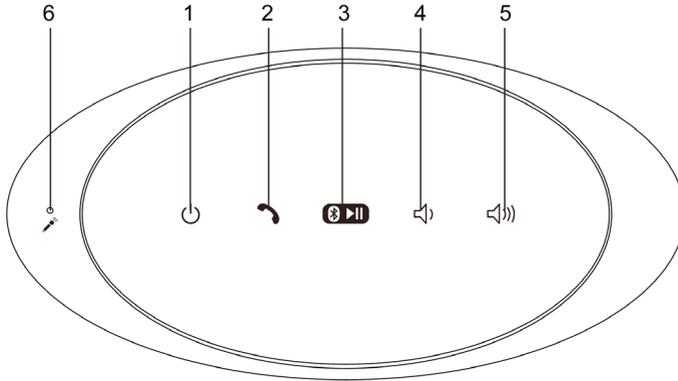

1. Turns the Speaker ON/OFF
2. Press to answer any incoming calls
3. Press and hold to search for a bluetooth connection
4. Decrease volume
5. Increase volume
6. Press to speak into the phone

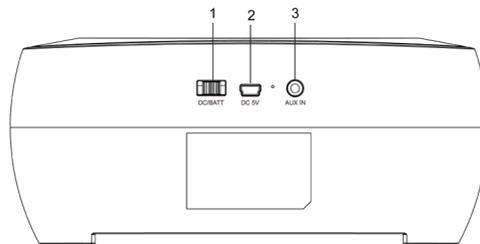

1. DC/BATT : Switch for changing the DC5V and Built-in lithium battery
2. DC 5V:DV 5V power supply, built-in lithium battery power supply jack ( Beside is the LED indicate light for the Battery )
3. AUX IN: 3.5mm jack to connect the input jack of external sound source

# Using the Bluetooth Speaker

---

## LED Indicator Lamp

LED (Red): The red power indicator LED will stay ON in standby status;

LED (Green): The green LED indicator lamp will stay ON in startup status;

LED (Blue): The blue LED indicator lamp will flicker during the Bluetooth connecting and pairing and then it will stay ON after it;

## Hands-free microphone

### Power on function

(two ways are available)

**A.** Switch the "BATT/DC" switch at the back cover of machine to "DC" and plug the DC 5V power to DC jack at the back, at this time the red power LED indicator will be on, and then press "⏻" key to power on the speaker

**B.** Switch the "BATT/DC" back to "BATT", then it will use the built-in 3.7V lithium battery, at this time the red power LED indicator will be on, and then press "⏻" key to power on the machine.

### Remarks:

1. Under any function status, connect the unit with DC 5V adaptor, 3.7V built-in lithium will be charged.
2. It takes about 3 hours to charge from no power to full power for 3.7V built-in lithium battery

### Warning:



1. Apparatus shall not be exposed to ripping or splashing and no objects filled with liquids, such as vases, shall be placed on the apparatus.



2. Where the mains plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.

### Start Up

Press "⏻" key shortly after power-on to startup,

1. During the first use, the blue LED lamp will flicker to access to PAIR mode.
2. Once PAIR has succeeded, the blue LED lamp will turn on and flicker once every one second to access to SEARCH mode, the Bluetooth will connect the equipment and mobile phone used last time automatically.
3. **Access to SEARCH mode:** The Bluetooth will connect the equipment and mobile phone used last time automatically, and the product will come into the CONNECTION mode when it connects successfully within 10 seconds and will come into the standby mode if not.

### Power Off

Shortly press "⏻" key in the standby mode to access POWER-OFF mode and the red LED lamp keeps ON.

# Using the Bluetooth Speaker

---

## Bluetooth Pair Mode

1. Users can enter into this mode from two states:
2. Press “**⏻**” for more than 3 seconds in SEARCH mode or standby mode.
3. Put the mobile phone within 3 meters;
4. Press “**⏻**” key for more than 3 seconds, the blue LED will flicker after which it will enter into PAIR status;
5. Activate the Bluetooth functions of Bluetooth mobile phone so that the mobile phone starts to search for the Bluetooth device (please refer to the user’s manual of mobile phone)
6. Select “GVA-BS09” from the device list that have been found by the cell phone. In some cases your cell phones will ask for a identification code “0000” . Press ENTER key to match the product and mobile phone and after success, the green /the blue LED lamps will keep ON.
7. Press RETURN key of mobile phone to exit from the mobile phone menu and make sure that the distance between the hands-free and mobile phone is within 10 meters and free from any obstacle, users can answer calls and play music at this moment.
8. The speaker will make a beeping noise when pairing is successful.

## Note:

- The Speaker will enter a standby mode if it cannot connect to a Bluetooth device on Startup. The speaker will then enter into CONNECTION mode when PAIRING is successful.
- When the paired equipment list exceeds the maximum capacity, For example 8 devices, the product will automatically clear the first equipment in its memory.
- Bluetooth function will be disabled if AUX-in cable is plugged into the speaker.

## Search Mode

Press and hold “**⏻**” key during startup or in PAIR mode to enter into SEARCH mode. The blue LED will flicker once every second; while in the SEARCH mode, the product will try to connect to the equipment it connected to last time; and will enter into the CONNECTION mode with that device if the equipment is found.

The speaker will enter into the STANDBY mode 10 seconds after search.

# Recycling

---

## Standby Mode

The blue LED lamp will flicker slowly and the blue lamp will flicker once every 5 seconds; while in the standby mode, it will only exit this mode once a connection has being made with a device or once it has connected to all equipment once paired, 8 at most in records.

## Connection Mode

The blue LED lamp keeps ON after PAIR; when the earphone icon does not appear on the mobile phone screen, just activate the Bluetooth connection as below:

1. Use the mobile phone to select "GVA-B509" in the phone PAIR list for connection;
2. Shortly press " " key and select "Accept to connect" on the mobile phone screen.
3. To disconnect, just press " " key for a longer time, or select to disconnect on the mobile phone and enter into the standby mode.

## In Bluetooth music play mode, users can:

Shortly press " " or press and hold " " to adjust the volume.

Shortly press " " key to play/ pause the music play.

## Users use Hands-free Function

### Answer Calls

The speaker will ring up when there are incoming calls during music play, just press " " key shortly to answer.

### Hang up Calls

Press " " key shortly during hands-free call to hang up calls and then return to the music play mode.

### Refuse Calls

When there are incoming calls, just press and hold " " key for 2-3 seconds to refuse calls.

## Aux-in Mode

When AUX IN line is connected to AUX IN Jack, the system will automatically pause the Bluetooth, the blue LED turns off and the unit enters into AUX IN mode. Then users can press or press " " key or " " key shortly or for a longer time to adjust the volume.

When users disconnected AUX IN line completely out of AUX IN Jack, the system will re-enter into the Bluetooth SEARCH mode and search for the equipment connected to last time.

**Note:** When adjusting the volume, you can press  and  button on the speaker, or adjust volume from paired device.

## Product Specification

---

Bluetooth specifications:	Bluetooth 2. 1+EDR
Output power:	Output Level 2, and the longest connecting distance of 10 meters
Working frequency scope:	2. 402GHz -2. 480GHz unlicensed ISM band
Supporting Profiles:	HSP/HFP 1. 5/ A2DP and AVRCP Profiles
Unit size:	196x92x85mm

## Notes

---